



## EL8000-MSC Edgeline series of rugged cases

6U MilSpec Rugged Enclosure with integrated wheels and tow handle

### Overview


The ultimate in protection for the HPE Edgeline EL8000 Converged Edge Server System and related mission critical components. The structural rigidity of the stackable case eliminates distortion resulting from high temperature exposure. The two 2" interchangeable lids with ¼ turn latches replace mismatched rack-mount lids and knuckle busting latches, while creating a watertight fit. Each case comes standard with integrated wheels and a sturdy towing handle. Additional optional accessories are shown on page 2, to include rail kits for switches, accessory drawers and an uninterruptible power supply (UPS).

Taking the Edgeline EL8000 into extreme environmental and operational conditions is now possible; a viable solution for Military, Federal, and Commercial sectors. The EL8000-MSC from UltraLife was custom designed to support the Edgeline EL8000 Converged Server System and enables edge computing in the most austere environments and locations.

### Features

- ▶ ***Designed for HPE Edgeline EL8000 Converged Servers***
- ▶ ***9.5" Half Rack Mount aluminum case***
- ▶ ***Protection class IP 65 through seam-welded housing and lid with peripheral seal***
- ▶ ***Impervious to elements: Case withstands temperature range of -238° to 302° F; UV, water, weather and corrosion resistance***
- ▶ ***Shock and vibration dampened***

Follow Us Online:




[www.hpe.com/edgeline](http://www.hpe.com/edgeline)  
[www.ultralifecorporation.com/commsys](http://www.ultralifecorporation.com/commsys)


Uninterruptible Power Supply  
SKU: R7S06A



Accessory Drawer Kit  
SKU: TBD


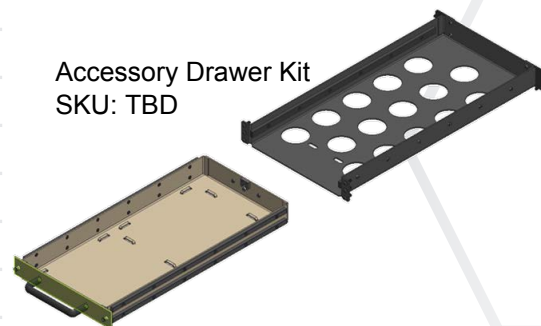


HPE StoreFabric Switch SKU: R0P78A  
Rail Mounting Kit SKU: R6T79A

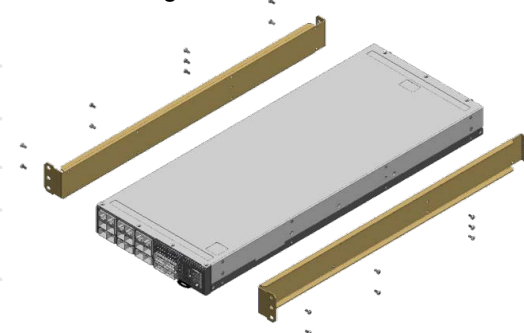

## EL8000-MCS Specifications

HPE PN / Color:	R4D12A – Ultralife EL8000 MCS-T Tan
	R6Q36A – Ultralife EL8000 MCS-G Gray
	R6Q37A – Ultralife EL8000 MCS-Z Clear Coat Zinc
Size (H x W x L inches):	14 x 16.75 x 27 (6 Rack Units)
Weight:	43 lbs.
Standards:	MilStd-810G, MilStd-295, DIN EN 60 529
	MilStd-461, IEC 34-5/529
Temperature Range:	-238° to 302° F
Finish:	• Paint - FED-STD (Federal Standard)
	• Clear anodized
	• Stenciling and silk screening available
Material	Aluminum
General:	Integrated wheels and tow handle
	High strength to weight ratio
	100% Recyclable

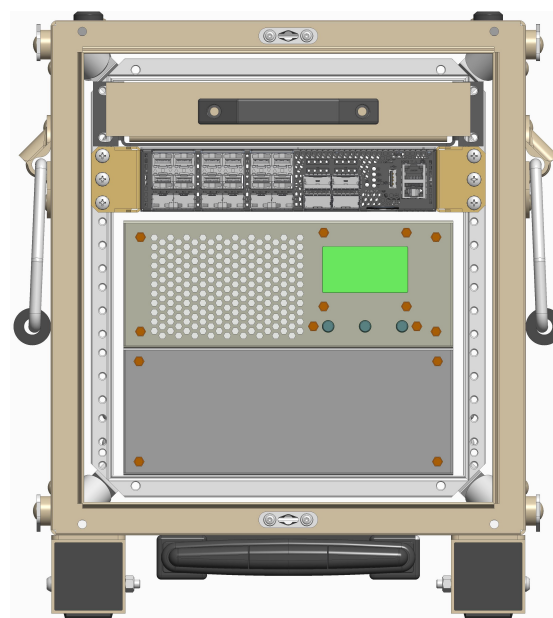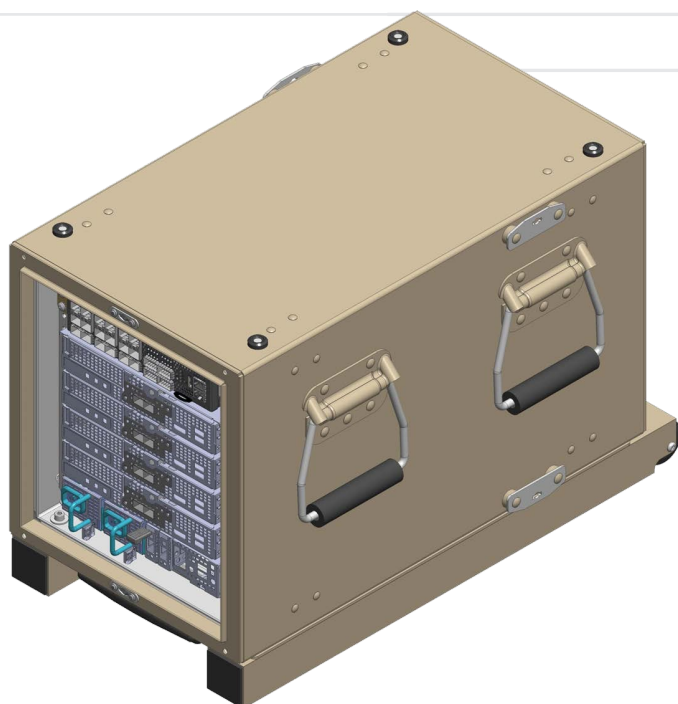

For more information, please contact your HPE Enterprise Account Manager



[www.hpe.com/edgeline](http://www.hpe.com/edgeline)  
[www.ultralifecorporation.com/commsys](http://www.ultralifecorporation.com/commsys)

Follow Us Online:

